

Heavy-Duty C-Hook

With capacities from 5 to 50 tons, this C-hook is built to perform. A mill favorite, the standard design shows up and does the work every day. Need customizations like padding for coil protection, other capacities, or something else?


Product Features:

- Designed for heavy-duty applications
- High-tensile alloy steel plate reduces physical size and weight
- Counterbalanced to hang level when empty
- Inside radius on hooks avoid coil edge contact
- Curved coil saddle is standard
- Guide handles for ease of hook positioning
- Handles a wide range of coil widths
- Available with optional padding for additional coil protection
- Complies with ASME standards



⚠ WARNING

Center of the hoist and bail must be in-line with the load's center of gravity.

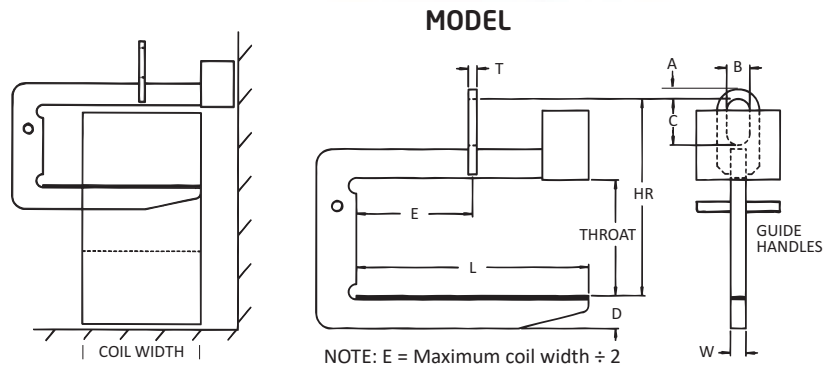

Model Number	Capacity (tons)	Dimensions (inches)											Weight (lbs.)
		Coil Width		Throat	Lifting Arm			HR Headroom	Bail Dimensions				
		Max.	Min.		Length L	Depth D	Width W		Opening			Thk. T	
							A	B	C	T			
82-5-36	5	36	24	24	30	5.54	4	37.5	1-1/2	4	7	1-1/4	438
82-5-48		48	30	24	39	6.125	4	38	1-1/2	4	7	1-1/4	564
82-5-60		60	36	24	48	6.8	4	38.75	1-1/2	4	7	1-1/4	724
82-7 1/2-36	7-1/2	36	24	24	30	5.9	4	37.75	1-1/2	4	7	1-1/2	615
82-7 1/2-48		48	30	24	39	6.6	4	38.5	1-1/2	4	7	1-1/2	805
82-7 1/2-60		60	36	24	48	7.2	4	39.2	1-1/2	4	7	1-1/2	980
82-10-48	10	48	30	24	39	7.6	4	41.5	2	5	9	1-3/4	968
82-10-60		60	36	24	48	7.5	4	41.375	2	5	9	1-3/4	1295
82-10-72		72	42	24	57	8.8	4	42.6	2	5	9	1-3/4	1712
82-15-48	15	48	30	30	39	7.4	4	47.25	2	5	9	1-3/4	1457
82-15-60		60	36	30	48	8.2	4	48	2	5	9	1-3/4	1908
82-15-72		72	42	30	57	8.9	4	48.75	2	5	9	1-3/4	2330
82-20-60	20	60	36	30	48	9.4	4	52.25	2-1/4	6	12	2	2307
82-20-72		72	42	30	57	10.4	4	53.25	2-1/4	6	12	2	2832
82-25-60	25	60	36	34	48	9.3	4	58	2-1/2	6	14	2-1/4	3109
82-25-72		72	42	34	57	10.13	4	58.9	2-1/2	6	14	2-1/4	3928
82-30-60	30	60	36	34	48	10	4	58.75	2-3/4	6	14	2-1/2	3400
82-30-72		72	42	34	57	10.9	4	59.7	2-3/4	6	14	2-1/2	5567
82-40-72	40	72	42	38	57	11.4	5	68.14	3-1/4	7	18	3	5850
82-50-84	50	84	48	45	64-1/2	13.13	6	77	3-3/4	7	18	3	8685

Other sizes available, consult factory.